



APPLICATION  
EXAMPLE



EXTERIOR  
DRAWING

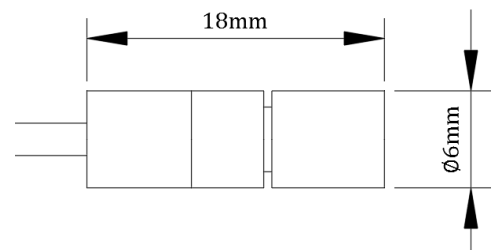

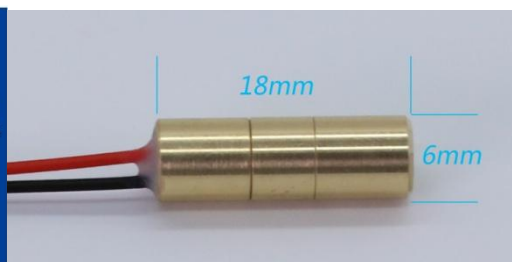

**PERFORMANCE INDEX**

**Optics**

Wavelength ( nm )	515-520nm	635-650nm	780-980nm
Wavelength Error	±5nm	±5nm	±10nm
Power(mw)	0.5-10mW	0.1-10mW	100-500mW
Light Type	Dot		
Beam Angle	NA		
Straightness	NA		
Focus	Manual Focus		
Work Distance	Provide laser modules with customized working distance		

**Electrical**

Laser Driven mode	CW/TTL		
Work Voltage(V)	3-5v/12-24v		
Work Current(mA)	<100mA	<35mA	<700mA
Tail Line	Red Black Line		
Protection	Anti-reverse, Anti-interference		

**Mechanical**

Dimension(mm)	Φ6×18mm
Material	Brass

**Other**

Working Temperature	-10 ~ 50°C ( Conventional )
Storage Temperature	-40 ~ 85°C ( Conventional )
Working Life	≥10000Hours