



APPLICATION
EXAMPLE

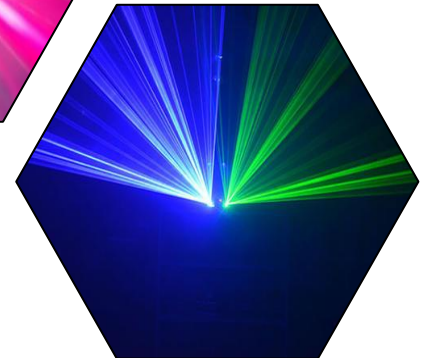

EXTERIOR
DRAWING

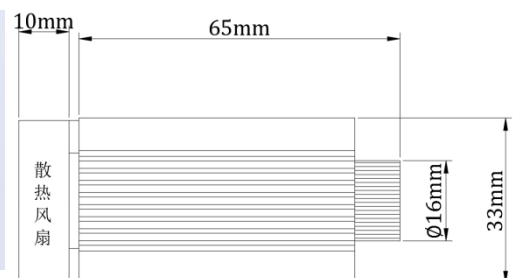

PERFORMANCE INDEX

Optics

Wavelength (nm)	405-450nm
Wavelength Error	±10nm
Power(mw)	0.5W/1.6W
Light Type	Dot
Beam Angle	NA
Straightness	NA
Focus	Manual Focus

Electrical

Laser Driven mode	CW/TTL
Work Voltage(V)	12v
Work Current(mA)	<4500mA
Tail Line	DC Line/Black Line
Protection	Anti-reverse, Anti-interference

Mechanical

Dimension(mm)	33 (L) ×33 (W) ×65 (H) mm
Material	Black Aviation Aluminum

Other

Working Temperature	0 ~ 70°C (Conventional)
Storage Temperature	-40 ~ 85°C (Conventional)
Working Life	≥8000Hours